



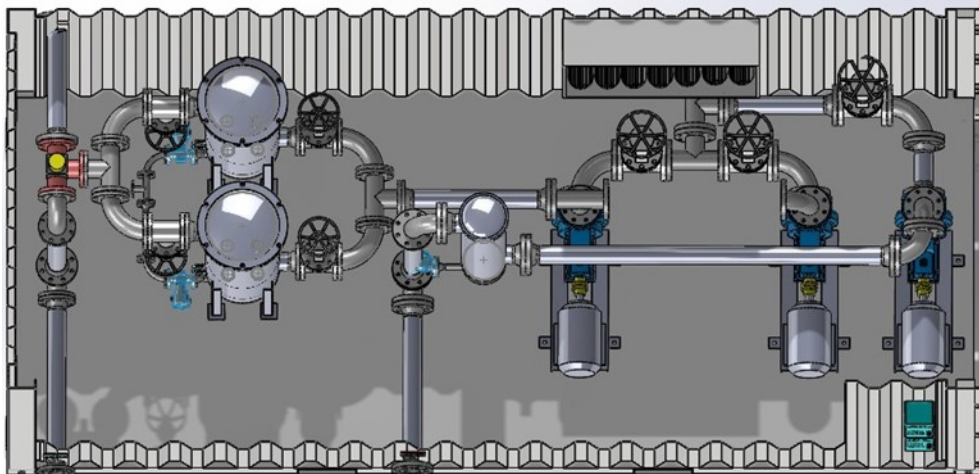

Product Release

Fuel Coalescing/Separator System
8KLF-DCF-200-50-4-2-FLN-150-25

The high volume/high flow system is designed to filter fuel at every stage is capable of filtering up to 400 gmp. When unloading the fuel from the tanker the valve will adjust so the fluid flows directly through the filtration system. When in stand-by, the separator is designed to operate as a kidney loop. When dispensing fuel, the valve will adjust in order to draw fuel from the storage tanks to the fueling station.

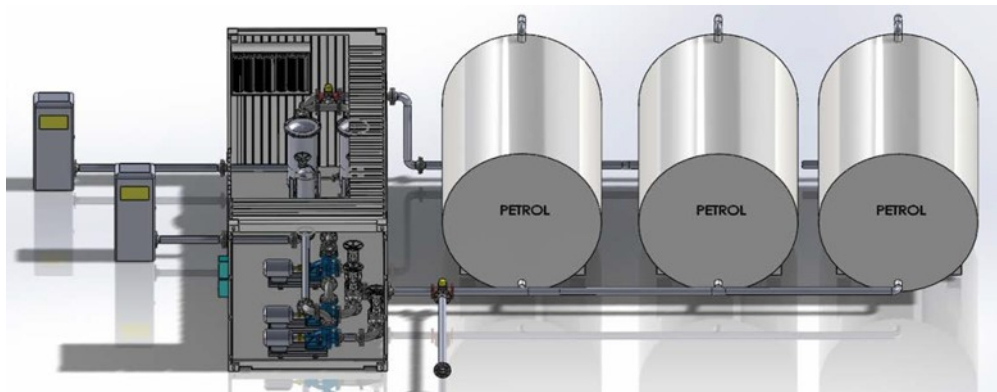

The above image is of a complete system installed in a 20'x 8' sea shipping container and includes: 3- pumps, all valves and piping, HV system, LV system, 9- spare elements, electronic selector panels, interior lighting and electrical panel.